



US006942560B2

(12) **United States Patent**
Hofmann et al.

(10) **Patent No.:** **US 6,942,560 B2**
(45) **Date of Patent:** **Sep. 13, 2005**

(54) **ATTACHMENT AND RAPID-CHUCKING SYSTEM, COMPRISING A ROTATABLY DRIVEN, DISC-SHAPED HUB**

(58) **Field of Search** 451/342, 344, 451/359, 509, 508, 540, 548

(75) **Inventors:** **Albrecht Hofmann**, Steinenbronn (DE); **Harald Krondorfer**, Ludwigsburg (DE); **Markus Heckmann**, Leinfelden-Echterdingen (DE); **Thomas Schomisch**, Leinfelden-Echterdingen (DE)

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,747,343	A	*	5/1956	Gellert	451/342
3,623,281	A	*	11/1971	Moffat	451/509
6,110,027	A	*	8/2000	Muller	451/359
6,110,028	A	*	8/2000	Chung	451/359
6,309,288	B1	*	10/2001	Chung	451/359
6,786,811	B2	*	9/2004	Krondorfer et al.	451/342
6,814,655	B2	*	11/2004	Hofmann et al.	451/342
2003/0176153	A1	*	9/2003	Krondorfer et al.	451/359

(73) **Assignee:** **Robert Bosch GmbH**, Stuttgart (DE)

(*) **Notice:** Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

FOREIGN PATENT DOCUMENTS

DE	201 08 986 U	8/2001
DE	100 17 458 A	10/2001
WO	01 08850 A	2/2001

* cited by examiner

Primary Examiner—Jacob K. Ackun, Jr.

(74) *Attorney, Agent, or Firm*—Michael J. Striker

(21) **Appl. No.:** **10/495,023**

(22) **PCT Filed:** **Feb. 19, 2003**

(86) **PCT No.:** **PCT/DE03/00512**

§ 371 (c)(1),
(2), (4) **Date:** **May 10, 2004**

(87) **PCT Pub. No.:** **WO03/095147**

PCT Pub. Date: **Nov. 20, 2003**

(65) **Prior Publication Data**

US 2004/0266325 A1 Dec. 30, 2004

(30) **Foreign Application Priority Data**

Apr. 24, 2002 (DE) 102 18 196


(51) **Int. Cl.⁷** **B24D 13/20**

(52) **U.S. Cl.** **451/359; 451/540**

(57) **ABSTRACT**

The invention is based on an insert tool with a rotationally driveable disk-shaped hub and an abrasive disposed in particular in a radially outer region, in particular of the kind used for a cut-off wheel, a grinding disk, a rough grinding disk, a cutting disk, or an abrasive paper. The invention proposes that the hub (10) have at least one mount (16, 18, 20), which is disposed off-center, extends in the axial direction (14), and is intended for a bolt that constitutes a functional element of a quick-action clamping system.

9 Claims, 2 Drawing Sheets

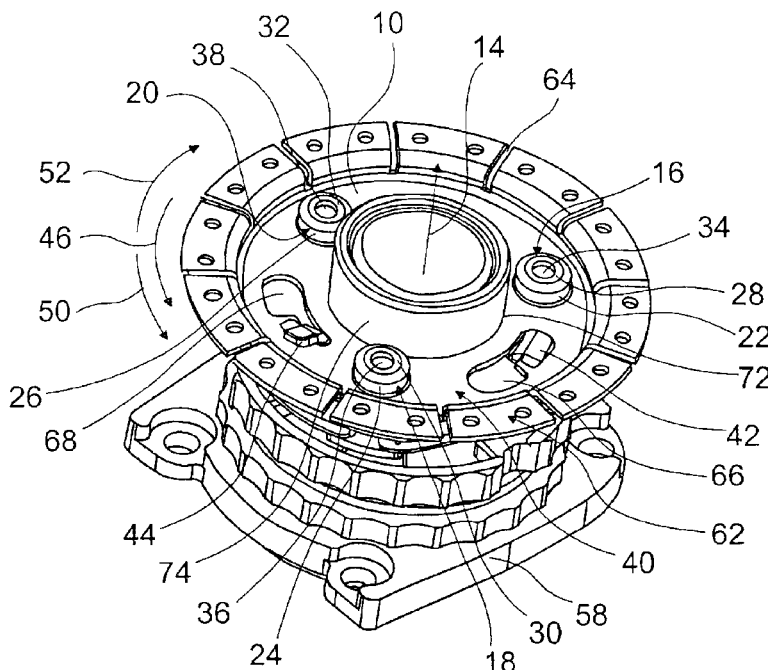

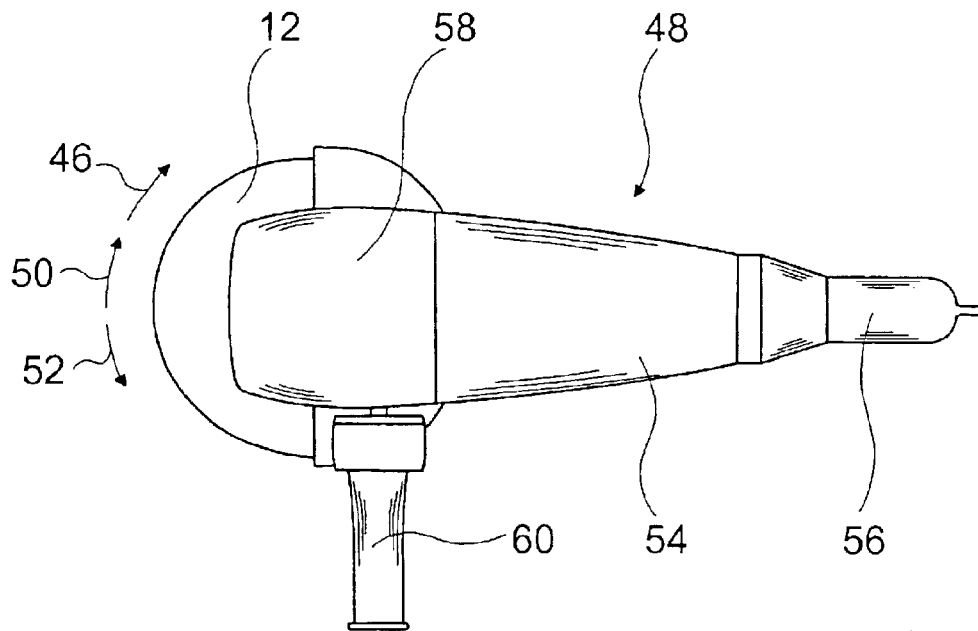


Fig. 1

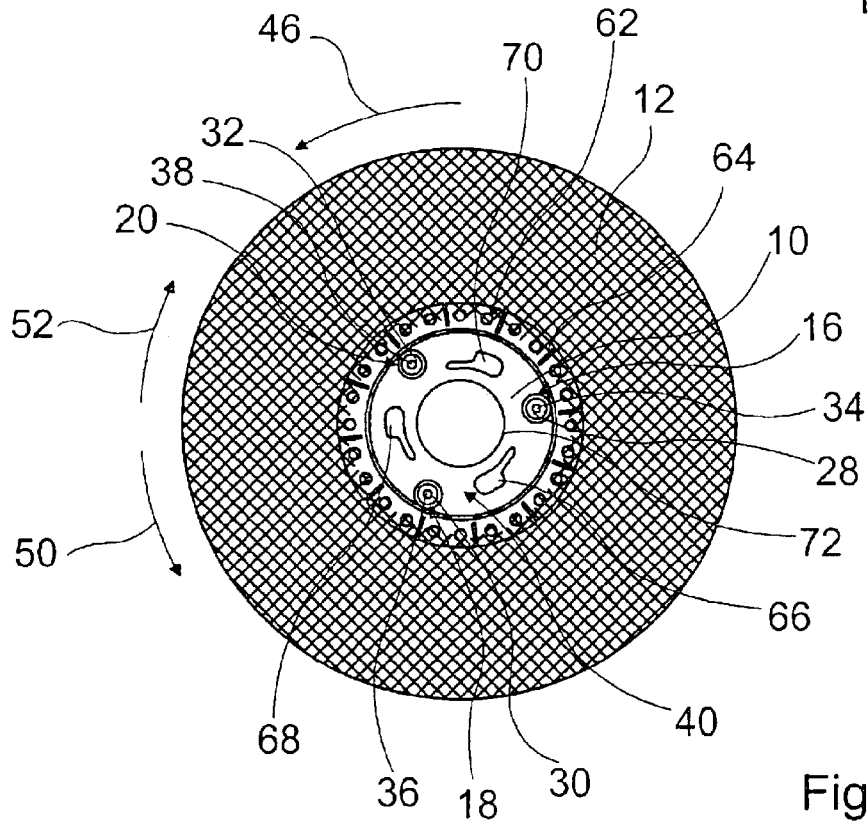


Fig. 2

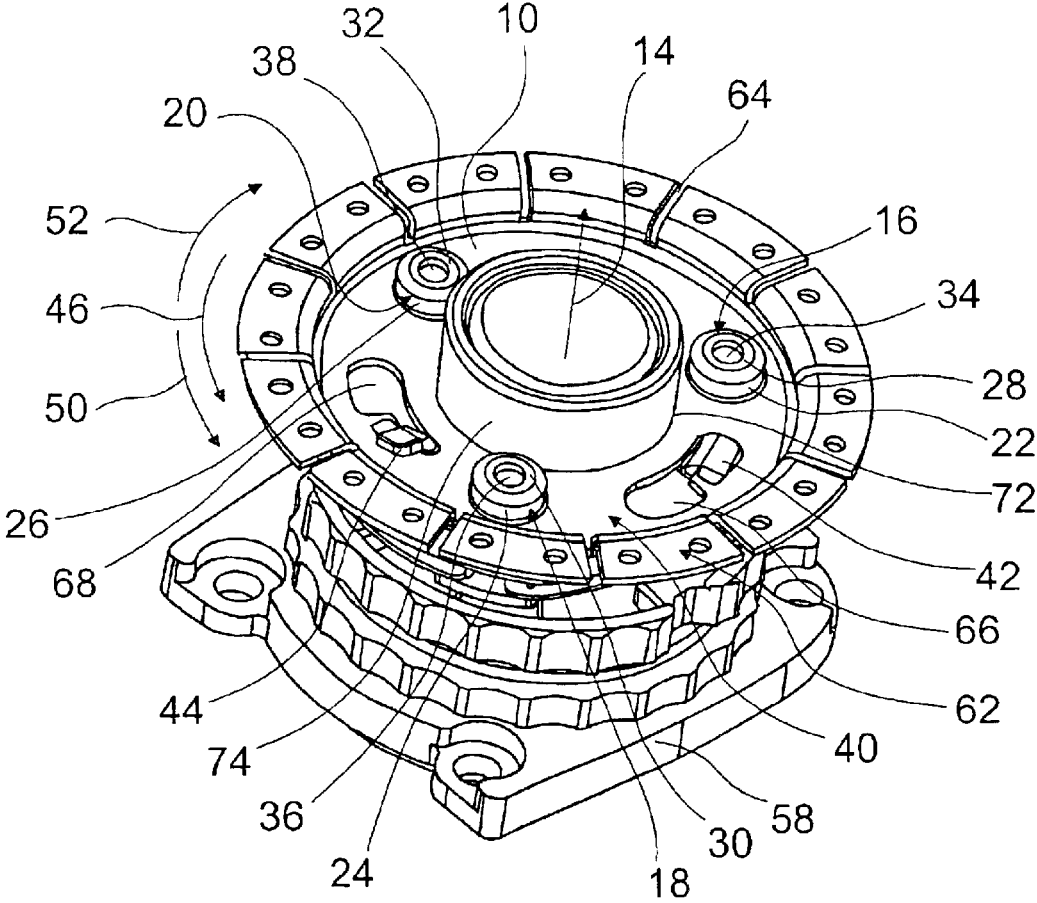


Fig. 3

ATTACHMENT AND RAPID-CHUCKING SYSTEM, COMPRISING A ROTATABLY DRIVEN, DISC-SHAPED HUB

BACKGROUND OF THE INVENTION

The invention is base on an insert tool and a quick-action clamping system with a rotationally driveable disk-shaped hub.

Disk-shaped insert tools, e.g. grinding or cut-off wheels for angle grinders, are usually comprised of a bonded abrasive and have a circular socket in the center via which the insert tool can be attached to an angle grinder spindle with a retaining nut in a nonpositive, frictionally engaging fashion in the circumference direction and in a positively engaging fashion in the axial direction. There are known insert tools that have a reinforcing plate made of sheet metal in the vicinity of the socket as well as those that do not have a reinforcing plate.

SUMMARY OF THE INVENTION

The invention is based on an insert tool with a rotationally driveable disk-shaped hub and with an abrasive disposed particularly in a radially outer region, in particular of the kind used in a cut-off wheel, a grinding disk, a rough grinding disk, a cutting disk, an abrasive paper, etc.

The invention proposes that the hub have at least one axially extending socket disposed off-center for a functional element of a quick-action clamping system, which element is embodied in the form of a bolt; the shape of the bolt can have a cross section deemed appropriate by one skilled in the art, for example a cross section that is circular, elliptical, triangular, square, polygonal, etc. The functional element can be advantageously prevented from inadvertently colliding with a work piece to be machined by embodying the axial span of the socket as preferably greater than a distance that the functional element or bolt protrudes from the hub. Changing the hub whenever the insert tool is replaced makes it possible to assure a constant protection function. The socket also constitutes a flat support for the functional element, which makes it possible to advantageously prevent the hub from cutting into the functional element. A wear on the functional element due to the influence of abrasive dusts such as corundum dust can be reduced because the socket formed onto the hub covers the functional element to a large extent. The hub can be safely detached from the functional element at any time. A premature wear on the functional element due to its being cut into can be prevented and service intervals can be extended. The axially extending socket can also advantageously prevent the insert tool from being mounted into a tool socket in a laterally reversed orientation. Furthermore, an operator can immediately recognize a correct mounting side by looking at the socket, which is important in insert tools that are rotation direction specific.

The socket can be of one piece with the hub or can be a part separate from it. If the socket and the hub are embodied as separate parts, then different materials can be used, e.g. metal for the hub and plastic for the socket, etc. However, it is particularly advantageous if the socket is of one piece with the hub. This permits the production of a particularly stable socket with an especially advantageous protection of the functional element from mechanical damage. The socket here can be formed onto the hub in a particularly simple, inexpensive manner by means of a deep-drawing process.

If the socket has a closed side wall, this permits a particularly rigid embodiment with an advantageous protec-

tion of the functional element and permits the socket to transmit powerful moments. However, it is also conceivable for the side wall to be embodied as slotted. A slotted side wall advantageously permits compensation for tolerances by means of elastic deformations and permits a simple prevention of play between the socket and the functional element. In addition, dirt that collects in the socket can be removed through the slot in a structurally simple manner when the functional element is inserted.

In another embodiment, the invention proposes that the socket have a round cross-sectional area. The functional element that engages in the socket can be advantageously embodied with a round cross-sectional area. The functional element can be inexpensively produced and can be reliably prevented from tilting in the socket.

The invention also proposes that the socket have at least one through opening in its end oriented in the axial direction. When the functional element is inserted into the socket, dirt and abrasive dust contained in the socket can be easily be pushed through the through opening by the functional element and then conveyed out of the socket.

If the socket is disposed in a recessed region of the hub, then the shape of the hub can provide a further protection of the functional element. The socket is recessed in relation to a disk plane, which can advantageously reduce the danger of a possible collision with a work piece.

If the socket protrudes in the axial direction beyond a hold-down element and in particular, if the socket is disposed in front of the hold-down element in a direction counter to a rotation direction, then this permits the hold-down element to be protected from an inadvertent collision with a work piece in an advantageous and structurally simple manner.

BRIEF DESCRIPTIONS OF THE DRAWINGS

Other advantages ensue from the following description of the drawings. The drawings show an exemplary embodiment of the invention. The drawings, the specification, and the claims contain numerous features in combination. One skilled in the art will also consider the features individually and will unite them in other meaningful combinations.

FIG. 1 is a schematic top view of an angle grinder,

FIG. 2 shows an insert tool according to the invention, and

FIG. 3 is an enlarged depiction of a hub without an abrasive, which hub is mounted in the angle grinder.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

FIG. 1 is a top view of an angle grinder **48**, with an electric motor, not shown in detail, that is mounted in a housing **54**. The angle grinder **48** can be guided by means of a first handle **56** extending in the longitudinal direction, which is integrated into the housing **54** at the end oriented away from the insert tool, and by means of a second handle **60** extending lateral to the longitudinal direction, which is fastened to a linkage housing **48** in the region of the insert tool.

FIG. 2 shows the insert tool from FIG. 1 when not installed. The insert tool has a rotationally driveable disk-shaped hub **10** made of sheet steel, whose radially outer region has an abrasive **12** attached to it, which constitutes a grinding disk. The abrasive **12** is essentially comprised of fiberglass mats, abrasive particles, and a bonding agent, which are pressed together to form a solid disk, the bonding agent having been hardened in a heating process.

The hub **10** has an inner region **40** and an outer region **62**, the inner region **40** being recessed in relation to the outer region **62** (FIG. 3). In its outer region **62**, the hub **10** has slot-shaped spaces **64** that are open at their radially outer ends. The spaces **64** have a uniform width and extend radially inward to the inner region **40**. The recessed inner region **40** has recesses **66, 68, 70** let into it for the attachment of the insert tool by means of a quick-action clamping system. The recesses **66, 68, 70** are disposed distributed uniformly in the circumference direction **50, 52** and, oriented counter to a rotation direction **46**, have a narrow, oblong region that is adjoined by a wider, oval region.

When the insert tool is mounted on the angle grinder **48**, three hold-down elements **42, 44**, only two of which are shown, reach in the axial direction **14** through the recesses **66, 68, 70** and affix the hub to a tool socket in the axial direction. In the middle region of the hub **10**, there is a circular opening **72** for centering the insert tool on a collar **74** of the tool socket of the angle grinder **48**.

Between the recesses **66, 68, 70**, the hub **10** has three sockets **16, 18, 20**, which are disposed off-center, extend in the axial direction, and are distributed uniformly in the circumference direction **50, 52**. Functional elements of the quick-action clamping system, which are comprised of bolts and are not shown in detail, engage in a positively engaging fashion in the sockets **16, 18, 20**. The bolts, which are each supported so that they can move in opposition to a respective spring element, can be used to operatively connect the insert tool to the quick-action clamping system; in an operating position of the insert tool, these bolts engage in detent fashion in the sockets **16, 18, 20** and fix the insert tool in a positively engaging fashion in the circumference direction **50, 52**.

The sockets **16, 18, 20**, which have a round cross section, are of one piece with the hub **10** and each have a closed side wall **22, 24, 26**. The sockets **16, 18, 20** are formed onto the hub **10** in a deep-drawing process.

On their ends **28, 30, 32** oriented in the axial direction **14**, the sockets **16, 18, 20** each have a respective through opening **34, 36, 38**. The sockets **16, 18, 20**, which are disposed in front of three hold-down elements **42, 44** in the direction counter to the rotation direction **46**, protrude beyond the three hold-down elements **42, 44** in the axial direction **14**. When being driven in the rotation direction **46**, the three hold-down elements **42, 44** are consequently each disposed in the slipstream of a respective bowl-shaped socket **16, 18, 20** and are protected by them.

Reference Numerals

10	hub
12	abrasive
14	axial direction
16	mount
18	mount
20	mount
22	side wall
24	side wall
26	side wall
28	end
30	end
32	end
34	through opening

-continued

36	through opening
38	through opening
40	region
42	hold-down element
44	hold-down element
46	rotation direction
48	angle grinder
50	circumference direction
52	circumference direction
54	housing
56	handle
58	linkage housing
60	handle
62	region
64	recess
66	recess
68	recess
70	recess
72	opening
74	collar

What is claimed is:

1. An insert tool with a rotationally driveable, disk-shaped hub (**10**) and with an abrasive (**12**) disposed in a radially outer region, wherein the hub (**10**) has at least one socket (**16, 18, 20**), which is disposed off-center, extends in the axial direction (**14**), and is intended for a bolt that constitutes a functional element of a quick-action clamping system, and wherein an axial span of said socket is greater than a distance that said bolt protrudes from the hub.

2. The insert tool according to claim 1, wherein the socket (**16, 18, 20**) is of one piece with the hub (**10**).

3. The insert tool according to claim 1, wherein the socket (**16, 18, 20**) has a closed side wall (**22, 24, 26**).

4. The insert tool according to claim 1, wherein the socket (**16, 18, 20**) has a round cross-sectional area.

5. The insert tool according to claim 1, wherein the socket (**16, 18, 20**) has at least one through opening (**34, 36, 38**) on an end (**28, 30, 32**) oriented in the axial direction (**14**).

6. The insert tool according to claim 1, wherein the socket (**16, 18, 20**) is disposed in a recessed region (**40**) of the hub (**10**).

7. The insert tool according to claim 1, wherein the socket (**16, 18, 20**) protrudes beyond a hold-down element (**42, 44**) in the axial direction (**14**).

8. The insert tool according to claim 7, wherein the socket (**16, 18, 20**) is disposed in front of the hold-down element (**42, 44**) in a direction counter to a rotation direction (**46**).

9. A quick-action clamping system, comprising an insert tool according to claim 1 and with a quick-action clamping mechanism, wherein said system operationally connects the insert tool to a drive shaft, wherein the insert tool is operationally connected to the quick-action clamping system by means of at least one bolt-shaped detent engagement element, wherein said detent engagement element is supported so that it can move in opposition to a spring element and, in an operating position of the insert tool, engages in detent fashion in the socket and fixes the insert tool in a positively engaging fashion in a circumference direction.

* * * * *